


Dual Cooling System

-86°C ULT Freezer

-86°C Ultra Low Temperature Freezer built up by two independent refrigeration systems and the Dual Cooling System offers the highest level of protection, If you stop any compressor by disconnecting it the other can maintain the freezer around the -75°C. Valuable and irreplaceable samples can always be securely stored with the highest confidence even if the compressor fails.



DW-HL1008T



*Temp.Uniformity



*Pulling Down to -80°C



Daily Consumption

*Typical freezer data based on internal testing with freezer setpoint at -80°C and ambient temperature at 25°C.

Features

Dual System
Two high-efficiency refrigeration systems

Touch Screen
10"LCD touch screen


Extreme Labor-saving
Ergonomic Design


Compressors
Two compressors

Vaccum Insulation
VIP insulation LBA foaming

Alarms System
Multiple Alarm Functions

Structure

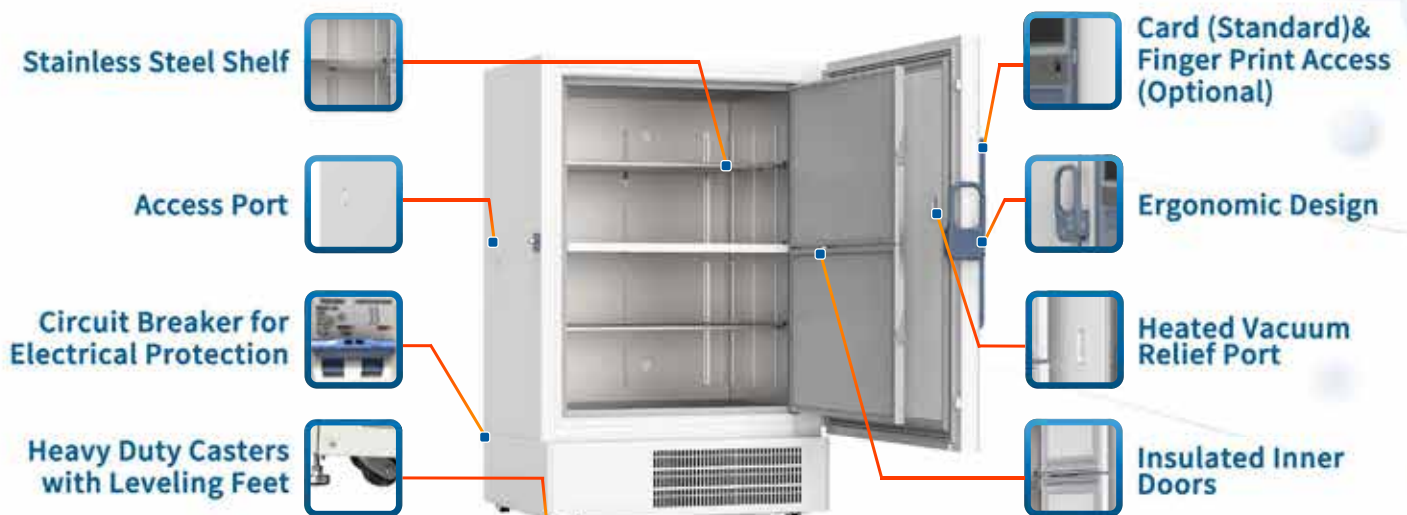

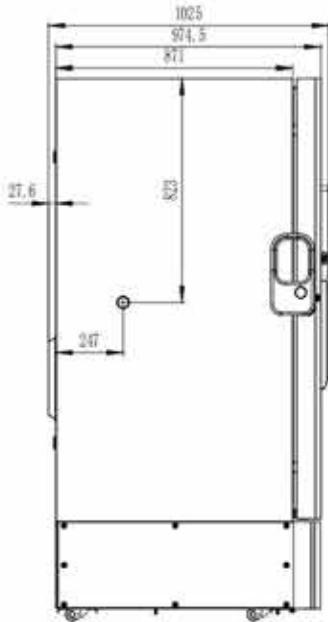

-86°C Ultra-low Temperature Freezer	
Model	DW-HL1008T
Capacity	1008L
Internal Size (W*D*H) mm/Inch	1022*696*1378/40.24*27.4*54.25
External Size (W*D*H) mm/Inch	1362*1025*1994/53.62*40.35*78.5
Package Size (W*D*H) mm/Inch	1473*1155*2176/58.0*45.5*85.7
NW(kgs/lbs)	390/859.80
Performance	
Temperature Range	-40~-86°C
Ambient Temperature	16~32°C
Cooling Performance	-86°C
Climate Class	N
Controller	Microprocessor
Display	10"HD Intelligent Touch Screen
Refrigeration	
Compressors	2pcs
Cooling Method	Direct Cooling
Defrost Mode	Manual
Refrigerants	HC
Construction	
External Material	Cold Rolled Steel
Inner Material	Galvanized Sheet(Optional Stainless Steel)
Shelves	3(Stainless Steel)
Access Test Port	2pcs. Ø 25mm
Casters	4+(2 Leveling Feet)
Data Logging/ Interval /Memory Capacity	USB/Record Every 5 Minutes/10 Years
Interface	Remote Alarm Contact, RS485, WIFI, 5V Power Interface, Network Port
Backup Battery	Yes
Alarms	
Temperature	High/Low Temperature, High Ambient Temperature, Condenser High Temperature Alarm
Electrical	Power Failure, Low Battery, Battery Power Detection Failure
System	Data Communication Failure, Door Ajar, Condenser Sensor Failure, Temperature Sensor Failure
Electrical Data	
Power Supply(V/Hz)	220~240/50
Rated Current (A)	11.2
Accessories	
Freezer Rack Model	ZKL304-552B-CT+ZKL304-652B-CT
Freezer Rack/Box (quantity)	14+14/770
Others	
Certification	CE

Options

- Modbus protocol for data transfer
- Comforms to 21 CFR 11 regulation
- CO₂ /LN₂ back up system
- Electromagnetic lock
- Inkless temperature chart recorder
- Racks, Boxes & Tubes
- Finger print access/Facial recognition