

Dual Cooling System

-86°C ULT Freezer



DW-HL578T

The unit is equipped with two independent refrigeration systems, this ultra-low temperature freezer ensures uninterrupted protection. If one compressor is not functioning, the other compressor will maintain the temperature at -80°C to ensure the samples safety(AT25°C)



*Temperature.Uniformity



*Pull Down to -80°C



Daily Consumption

**Typical freezer data based on internal testing with freezer setpoint at -80°C and ambient temperature at 25°C.*

Features



Dual System
Two high-efficiency refrigeration systems



Touch Screen
10"LCD touch screen



Ergonomic Handle
Improved handle design



Compressors
Two brand compressors






Vacuum Insulation
VIP insulation foaming



Alarms System
Multiple alarm functions

Structure

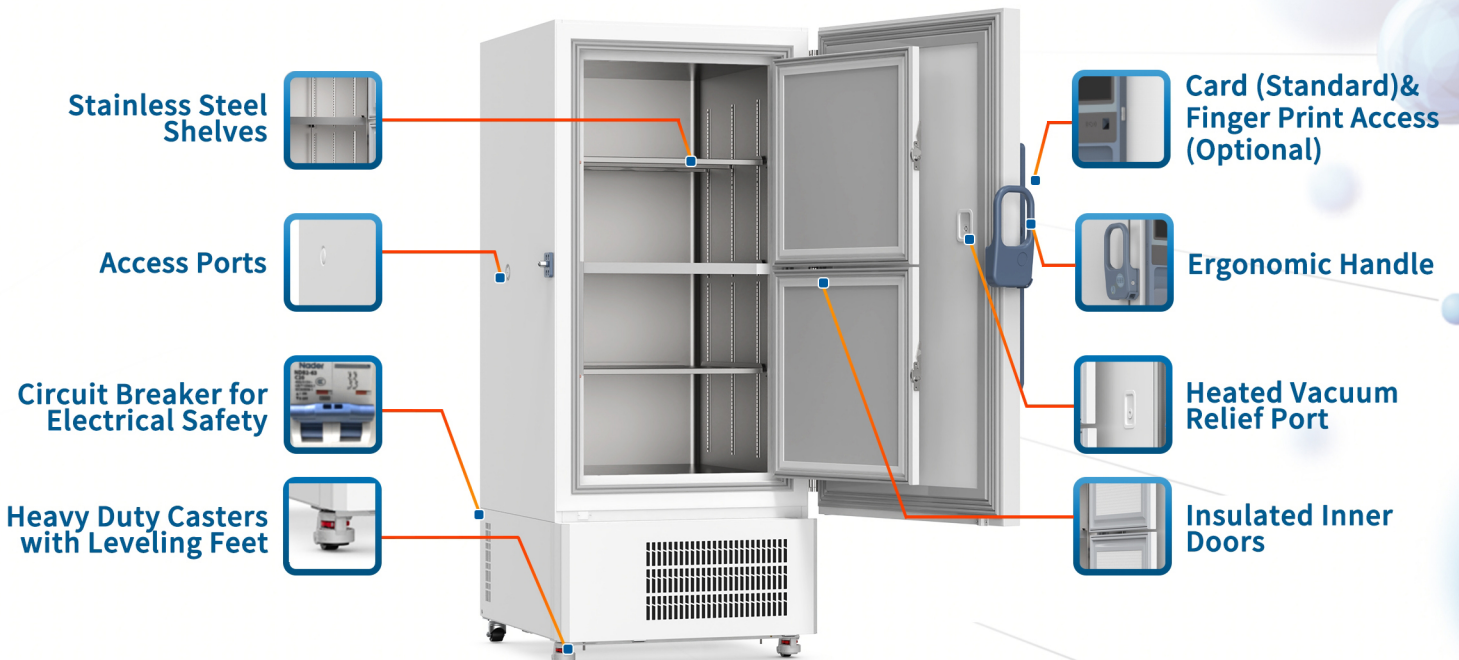

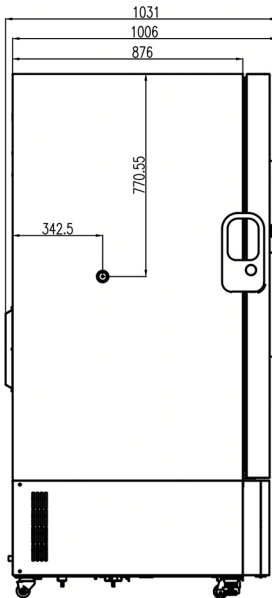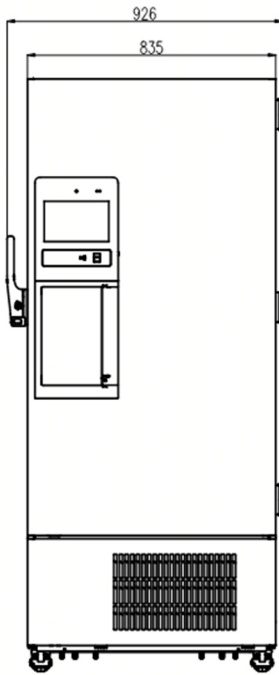

-86°C Ultra-low Temperature Freezer	
Model	DW-HL578T
Capacity	578L
Internal Size (W*D*H) mm/Inch	615*712*1290/24.21*28.03*50.79
External Size (W*D*H) mm/Inch	926*1031*1994/36.46*40.59*78.5
Package Size (W*D*H) mm/Inch	1005*1160*2132/39.6*45.7*83.9
NW(kgs/Lbs)	294/648
Performance	
Temperature Range	-40~-86°C
Ambient Temperature	16~32°C
Cooling Performance	-86°C
Climate Class	N
Controller	Microprocessor
Display	10" HD Intelligent Touch Screen
Refrigeration	
Compressors	2pcs
Cooling Method	Direct Cooling
Defrost Mode	Manual
Refrigerants	HC
Insulation Thickness(mm)	D:104, L/R: 110, B: 110
Construction	
External Material	Cold Rolled Steel
Inner Material	Galvanized Sheet(Optional Stainless Steel)
Shelves	3(stainless steel)
Access Test Port	2pcs. Ø 25 mm
Casters	4(2 leveling feet)
Data Logging/ Interval /Memory Capacity	USB/Record Every 5 Minutes/10 Years
Interface	Remote Alarm Contact, RS485, WIFI, 5V Power Interface, Network Port
Backup Battery	Yes
Alarms	
Temperature	High/Low Temperature, High Ambient Temperature, Condenser High Temperature Alarm
Electrical	Power Failure, Low Battery, Battery Power Detection Failure
System	Data Communication Failure, Door Ajar, Condenser Sensor Failure, Temperature Sensor Failure
Electrical Data	
Power Supply(V/HZ)	220-240/50
Rated Current (A)	9.5
Accessories	
Freezer Rack Model	ZKL304-552B-CT
Freezer Rack/Box (quantity)	16/400
Others	
Certification	CE

Options

- Modbus protocol for data transfer
- Inkless temperature chart recorder
- Comforms to 21 CFR 11 regulation
- Racks, Boxes & Tubes
- CO₂ /LN₂ back up system
- Finger print access/Facial recognition
- Electromagnetic lock